

Rex

PIPE & CABLE LOCATOR

SCHONSTEDT 
INSTRUMENT COMPANY
Making Locating Easier Since 1953

NEW! **Multi-Frequency**
Pipe & Cable Locator

- ✓ Ultralight Design
- ✓ Compact & Portable
- ✓ Pinpoint Accuracy




3 FREQUENCIES • 1 LOCATOR • ALL UTILITIES

World of SCHONSTEDT



schonstedt.com



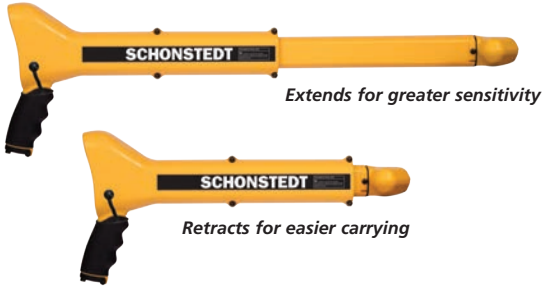

Slim, Sleek & Powerful Transmitter: 3.5 lbs and 1.75" thick

Receiver Specifications


Operating Frequency:	Active: 512 Hz, 33 kHz and 82 kHz Passive: 50 or 60 Hz Sonde: 512 Hz
Battery:	One 9V Battery
Battery Life:	12 Hours (intermittent usage)
Weight (incl. battery):	2.8 lbs (1.25 kg)
Operating Temperature:	-4°F to 140°F (-20°C to 70°C)
Overall Dimensions:	Closed: 17.5 in (44 cm) Extended: 27.7 in (70 cm)
Max. Depth Capability:	Approximately 19' (5.8 m) Sonde mode - approximately 5' - 15' (1.5 m to 4.2 m)
Water and Dust Resistance:	Rated IP54

Transmitter Specifications

Operating Frequency:	512 Hz, 33 kHz and 82 kHz
Operating Modes:	Conductive, Inductive, and Inductive Clamp
Max. Output Power: (Conductive mode @ 1000 Ω load)	512 Hz - 1/2, 1, 2 or 5 W 33 kHz - 1/2, 1, 2 or 5 W 82 kHz - 1/2 or 1
Battery Type:	Rechargeable NiMH pack (12V)
Battery Life:	8 Hours (intermittent usage)
Charging:	Internal Smart Charger powered by AC/DC power adapter
Dimensions:	10"W x 10.25"D x 1.75" H (25.4 cm x 26 cm x 4.5 cm)
Weight:	3.5 lbs (1.6 kg)
Operating Temp.:	-4°F to 140°F (-20°C to 70°C)
Backlighting:	White LED array
Water and Dust Resistance:	Rated IP54



A weight off your shoulder
Receiver + Transmitter = Under 7 lbs.

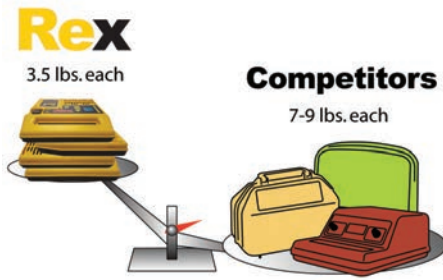

How does Rex stack up to the competition?

A new slim and ultralight transmitter is combined with a retractable receiver to make Rex the most user-friendly and affordable multi-frequency locator on the market. See how Rex stacks up in **low** price and **high** performance here: schonstedt.com/rx (or just scan the QR code)



Contact Us:
800-999-8280
info@schonstedt.com

Find Your Local Dealer:
schonstedt.com



SCHONSTEDT 
INSTRUMENT COMPANY

Making Locating Easier Since 1953